

NEO



Application :
Thin Client, Network device, Set-Top Box, VPN, VOIP, DVR and POS system


Technical Data :

. Dimension	50 H x 275 W x 171 D mm
. Material	Aluminum
. Color	Black
. Weight	2 Kgs (Incl. M/B)
. Storage Space	1 x 2.5" HDD

Optional Accessory :

- . Wall mount kit

Wall mount kit

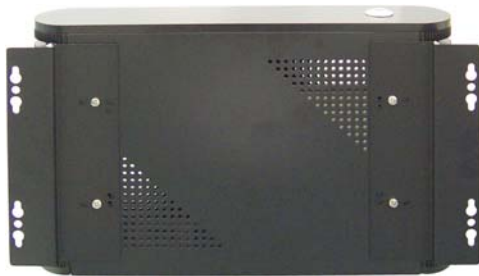



M/B information: (Please refer to M/B specification)

M/B Model	Description	Operation Temp.	
		CF	HDD
945ACI / 963ACI	Core 2 Duo solution / 4 LAN / Mini PCI / PCMCIA / SATA	35°C	35°C
945AMI	DVI / Video-in / TV-OUT	35°C	35°C
945CCI	4 COM ports	35°C	35°C
945ASI	4~16 ports Video-in	35°C	35°C
700ACV	3 LAN	60°C	40°C
700CCV	4 COM Ports	60°C	40°C
763ACV	2 PCMCIA Slot / 4 LAN	60°C	40°C
700AMV	Twin-view / Video-in	60°C	45°C
852ACI	4 LAN	60°C	45°C
852CWCI	4 COM ports / PCI 104 / Wide range DC-IN	60°C	45°C
853CWCI	4 COM ports / PCI / Wide range DC-IN	60°C	45°C
852ASI	4~16 Video-in	60°C	45°C
853AWMI	2 IEEE1394 / DVI / TV-Out / Wide range DC-IN	60°C	45°C
270CWCI	4 COM ports / LVDS / DVI / Wide range DC-IN	55°C	45°C
270AWMI	2 COM ports / LVDS / TV-Out / Wide range DC-IN / Video-in	55°C	45°C

Optional Module

Wireless Lan	Chip: RALINK / VIA , MINI PCI Interface, 802.11g Standard Driver: Win98, ME, 2K, XP, Linux, 128bit WEP Encryption Support
56K Modem (CX)	Chip: Conexant, USB Interface, Driver: Win98, ME, 2K, XP, Linux
ADSL	Chip: Conexant, ANSI T1.413 Issue 2 ITU-T G.992 (G.dmt) and G.992.2 (G.lite) Annex A,B. Driver: Win98, ME, 2K, XP, Linux

Dimension

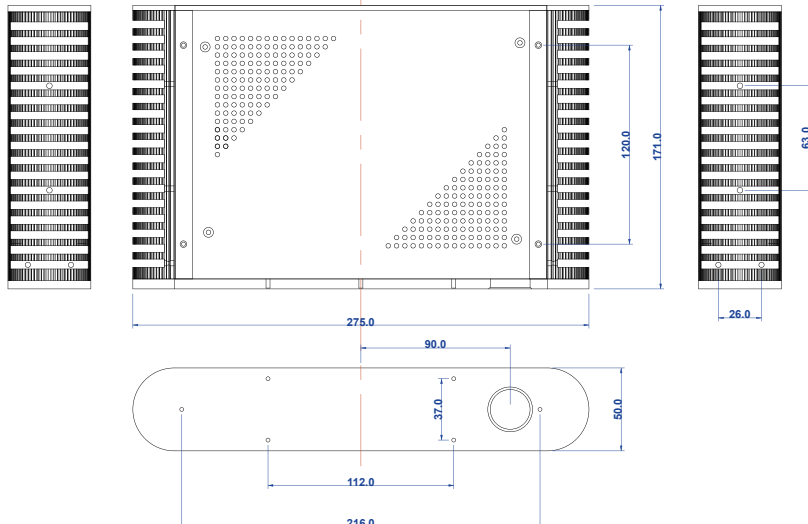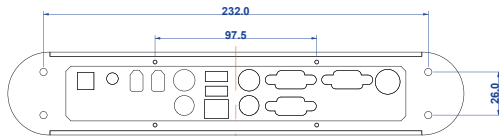

Wireless Lan