

SIZE DOES MATTER!

The Active Matrix LCD screen creates the most powerful visual images!

42" TFT LCD monitor

- Display Colors : 16.7 M
- Number of Pixels : 1920 x 1080
- Aspect Ratio : 16 : 9
- Brightness : 500 cd/m²
- Contrast Ratio : 1500 : 1
- Support Touch Screen



Networking

POS / Automation

DVR



Multimedia

42" LCD PC for Digital Signage



System Information

Main board	853AWA=	945AA=
CPU	Intel Celeron M 1GHz	Intel Core Duo / Core 2 Duo
Chipset	Intel 82852GM + ICH4	Intel 945GME + ICH7M
Memory	1 x DDR (max. 1GB)	2 x DDR2 (max. 3GB)
Storage	2.5" HDD / CF socket	
LAN	1 x Realtek RLT8100C 10/100M	2 x Realtek 8111C 10/100/1000M
USB	2 x USB 2.0	4 x USB 2.0
IO function	PS/2 Keyboard & Mouse	2 x RS232 / PS/2 Keyboard & Mouse
Video-In	1 port	
Audio	1 x RCA Jack L & R / Line-Out, Mic-In	Line-Out, Mic-In
Expansion	2 x PCI & 1 x Mini PCI	2 x PCI & 1 x Mini PCI & 1 x Mini card
Other function	2 x IEEE 1394 & SPDIF Out	—
Mounting Spec	600 x 200 mm	
Power Output	276 W	
Dimension	624 H x 1037 W x 113 D mm	
Weight	36.3 Kg	
Operating Temp	0~40 °C Fanless	0~45 °C Fan
Operating Humidity	10~80% RH 50°C	

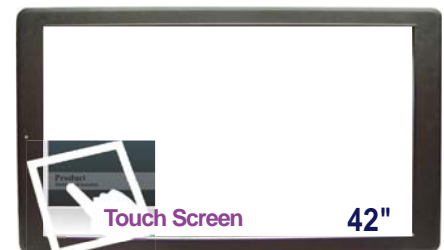

Embedded System